




Step1: First, Insert the screw through front fork hole on one side and put on the short spacer. Then pass it through the tire. Please notice to pass it through firstly the side of the brake pad located, then put on the long spacer. Lastly, pass it through the front fork hole on the other side and tighten it with a nut



Step2 :Install the brake caliper on the disc brake,align the screw holes and tighten screws

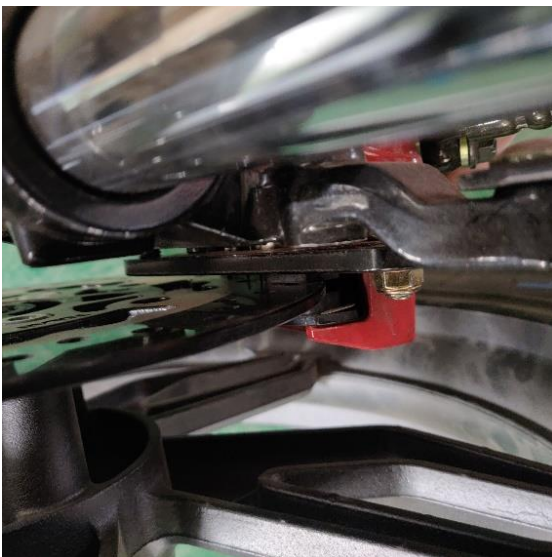

Step3: First fix the small aluminum block of the front brake cable on the fender, and pay attention to the brake cable before the fixing screws, and then fix the holes with the screws on the left and right sides corresponding to the fixing holes on the frame



Step4: Put the left and right hand pipes into the corresponding handle slots and fix them with screws and nuts